

## Transient Voltage Suppression Diodes Surface Mount – 3000W

### Descriptions

Transient Voltage Suppressors (TVS) are semiconductor devices designed to provide protection against over voltage transients. When over voltage events occur, the silicon TVS activates from an very high impedance status to a very low impedance status by operating in the avalanche mode and uses a large junction area to absorb large transient currents in a fast response time, protecting voltage sensitive electronics equipment from damaging.

Boarden supplies unipolar and bipolar TVS devices with axial and SMD packages, with maximum working voltage 5V to 550V, maximum power dissipation from 200W-5000W.



**SMC  
(JEDEC DO-214AB)**

### Features

- Glass passivated chip junction in SMC Package
- 3000W peak pulse power @10/1000μs
- Typical  $I_R$  less than 1μA above 13V
- Low incremental surge resistance
- Excellent clamping capability
- Typical failure mode is short from over-specified voltage/current
- Fast response time: typically less than 1.0ps from 0V to BV min
- EFT protection of data lines in accordance with IEC 61000-4-4
- UL94V-0 Flammability Rating
- Halogen free and RoHS compliant

### Applications

- Telecom and Network
- Industrial Products
- Business Machines
- Vehicles Electronics
- Power Adapter
- Consumer Products
- Security Protection

### Maximum Ratings and Thermal Characteristics (TA=25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Peak Pulse Power Dissipation by 10/1000μs Test Waveform	$P_{PPM}$	3000	W
Steady State Power Dissipation on Infinite Heat Sink at $T_L=75^\circ\text{C}$	$P_D$	6.5	W
Peak Forward Surge Current, 8.3ms Single Half Sine Wave Unidirectional Only <sup>(1)</sup>	$I_{FSM}$	300	A
Maximum Instantaneous Forward Voltage at 100A for Unidirectional Only <sup>(2)</sup>	$V_F$	3.5	V
Operating Junction and Storage Temperature Range	$T_J, T_{STG}$	-55 to 175	°C
Typical Thermal Resistance Junction to Lead	$R_{uJL}$	15	°C/W
Typical Thermal Resistance Junction to Ambient	$R_{uJA}$	75	°C/W

**Notes:**

1) Measured on 8.3ms single half sine wave or equivalent square wave, duty cycle=4 per minute maximum.


2)  $V_F < 3.5V$  for devices of  $V_{BR} \leq 200V$  and  $V_F < 5.0V$  for devices of  $V_{BR} \geq 201V$ .

## Electrical Characteristics (TA=25°C unless otherwise noted)


Type Number		V <sub>RMW</sub>	I <sub>R</sub> @V <sub>RMW</sub>	V <sub>BR</sub> @I <sub>T</sub> (V)			I <sub>T</sub>	V <sub>C</sub> @I <sub>PP</sub>	I <sub>PP</sub> MAX
Uni	Bi	(V)	(μA)	Min	Nom	Max	(mA)	(V)	(A)
3.0SMCJ5.0A	3.0SMCJ5.0CA	5.0	800	6.40	6.70	7.00	10	9.2	326.1
3.0SMCJ6.0A	3.0SMCJ6.0CA	6.0	800	6.67	7.02	7.37	10	10.3	291.3
3.0SMCJ6.5A	3.0SMCJ6.5CA	6.5	500	7.22	7.60	7.98	10	11.2	267.9
3.0SMCJ7.0A	3.0SMCJ7.0CA	7.0	200	7.78	8.19	8.60	10	12.0	250.0
3.0SMCJ7.5A	3.0SMCJ7.5CA	7.5	100	8.33	8.77	9.21	1	12.9	232.6
3.0SMCJ8.0A	3.0SMCJ8.0CA	8.0	50	8.89	9.36	9.83	1	13.6	220.6
3.0SMCJ8.5A	3.0SMCJ8.5CA	8.5	20	9.44	9.92	10.4	1	14.4	208.3
3.0SMCJ9.0A	3.0SMCJ9.0CA	9.0	10	10.0	10.6	11.1	1	15.4	194.8
3.0SMCJ10A	3.0SMCJ10CA	10	5	11.1	11.7	12.3	1	17.0	176.5
3.0SMCJ11A	3.0SMCJ11CA	11	1	12.2	12.9	13.5	1	18.2	164.8
3.0SMCJ12A	3.0SMCJ12CA	12	1	13.3	14	14.7	1	19.9	150.8
3.0SMCJ13A	3.0SMCJ13CA	13	1	14.4	15.2	15.9	1	21.5	139.5
3.0SMCJ14A	3.0SMCJ14CA	14	1	15.6	16.4	17.2	1	23.2	129.3
3.0SMCJ15A	3.0SMCJ15CA	15	1	16.7	17.6	18.5	1	24.4	123.0
3.0SMCJ16A	3.0SMCJ16CA	16	1	17.8	18.8	19.7	1	26.0	115.4
3.0SMCJ17A	3.0SMCJ17CA	17	1	18.9	19.9	20.9	1	27.6	108.7
3.0SMCJ18A	3.0SMCJ18CA	18	1	20.0	21.1	22.1	1	29.2	102.7
3.0SMCJ20A	3.0SMCJ20CA	20	1	22.2	23.4	24.5	1	32.4	92.6
3.0SMCJ22A	3.0SMCJ22CA	22	1	24.4	25.7	26.9	1	35.5	84.5
3.0SMCJ24A	3.0SMCJ24CA	24	1	26.7	28.1	29.5	1	38.9	77.1
3.0SMCJ26A	3.0SMCJ26CA	26	1	28.9	30.4	31.9	1	42.1	71.3
3.0SMCJ28A	3.0SMCJ28CA	28	1	31.1	32.8	34.4	1	45.4	66.1
3.0SMCJ30A	3.0SMCJ30CA	30	1	33.3	35.1	36.8	1	48.4	62
3.0SMCJ33A	3.0SMCJ33CA	33	1	36.7	38.7	40.6	1	53.3	56.3
3.0SMCJ36A	3.0SMCJ36CA	36	1	40.0	42.1	44.2	1	58.1	51.6
3.0SMCJ40A	3.0SMCJ40CA	40	1	44.4	46.8	49.1	1	64.5	46.5
3.0SMCJ43A	3.0SMCJ43CA	43	1	47.8	50.3	52.8	1	69.4	43.2
3.0SMCJ45A	3.0SMCJ45CA	45	1	50.0	52.7	55.3	1	72.7	41.3
3.0SMCJ48A	3.0SMCJ48CA	48	1	53.3	56.1	58.9	1	77.4	38.8
3.0SMCJ51A	3.0SMCJ51CA	51	1	56.7	59.7	62.7	1	82.4	36.4
3.0SMCJ54A	3.0SMCJ54CA	54	1	60.0	63.2	66.3	1	87.1	34.4
3.0SMCJ58A	3.0SMCJ58CA	58	1	64.4	67.8	71.2	1	93.6	32.1
3.0SMCJ60A	3.0SMCJ60CA	60	1	66.7	70.2	73.7	1	96.8	31
3.0SMCJ64A	3.0SMCJ64CA	64	1	71.1	74.9	78.6	1	103	29.1
3.0SMCJ70A	3.0SMCJ70CA	70	1	77.8	81.9	86.0	1	113	26.5
3.0SMCJ75A	3.0SMCJ75CA	75	1	83.3	87.7	92.1	1	121	24.8
3.0SMCJ78A	3.0SMCJ78CA	78	1	86.7	91.3	95.8	1	126	23.8
3.0SMCJ85A	3.0SMCJ85CA	85	1	94.4	99.2	104	1	137	21.9
3.0SMCJ90A	3.0SMCJ90CA	90	1	100	105.5	111	1	146	20.5
3.0SMCJ100A	3.0SMCJ100CA	100	1	111	117.0	123	1	162	18.5
3.0SMCJ110A	3.0SMCJ110CA	110	1	122	128.5	135	1	177	16.9
3.0SMCJ120A	3.0SMCJ120CA	120	1	133	140.0	147	1	193	15.5
3.0SMCJ130A	3.0SMCJ130CA	130	1	144	151.5	159	1	209	14.4
3.0SMCJ150A	3.0SMCJ150CA	150	1	167	176.0	185	1	243	12.3
3.0SMCJ160A	3.0SMCJ160CA	160	1	178	187.5	197	1	259	11.6
3.0SMCJ170A	3.0SMCJ170CA	170	1	189	199.0	209	1	275	10.9
3.0SMCJ180A	3.0SMCJ180CA	180	1	201	211.5	222	1	290	10.3
3.0SMCJ200A	3.0SMCJ200CA	200	1	224	235.5	247	1	322	9.3
3.0SMCJ220A	3.0SMCJ220CA	220	1	246	259.0	272	1	355	8.5
3.0SMCJ250A	3.0SMCJ250CA	250	1	279	294.0	309	1	404	7.4
3.0SMCJ300A	3.0SMCJ300CA	300	1	335	353.0	371	1	485	6.2
3.0SMCJ350A	3.0SMCJ350CA	350	1	391	411.5	432	1	566	5.3
3.0SMCJ400A	3.0SMCJ400CA	400	1	447	470.5	494	1	647	4.6
3.0SMCJ440A	3.0SMCJ440CA	440	1	492	517.5	543	1	712	4.2

For bidirectional type having V<sub>RMW</sub> of 10 volts and less, the I<sub>R</sub> limit is double.

## I-V Curve Characteristics

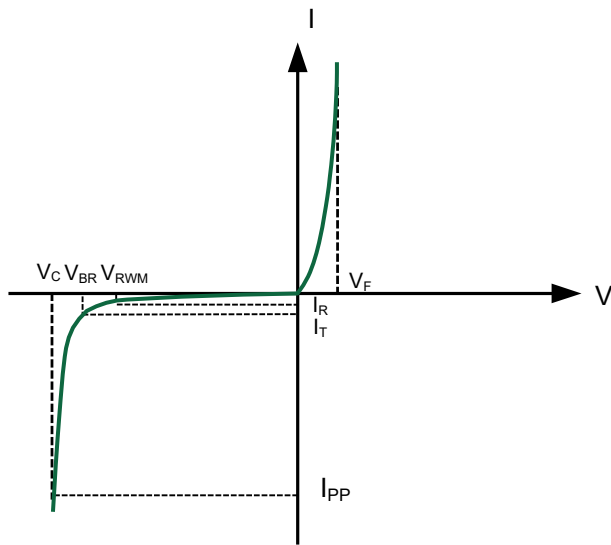

Uni-Directional TVS

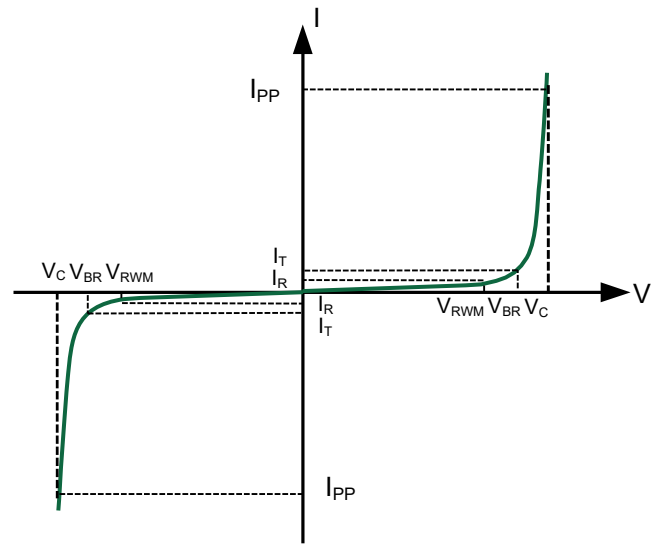

Bi-Directional TVS

**V<sub>RWM</sub> - Reverse Stand-Off Voltage** - Working Peak Reverse Voltage

**V<sub>BR</sub> - Breakdown Voltage** - Maximum current that flows through the TVS at a specified test current (I<sub>T</sub>)

**I<sub>T</sub> - Test Current** - Test Current

**V<sub>C</sub> - Clamping Voltage** - Peak voltage measured across the suppressor at a specified I<sub>ppm</sub> (peak impulse current)


**I<sub>PP</sub> - Peak Pulse Current** - Maximum Reverse Peak Pulse Current

**P<sub>PPM</sub> - Peak Pulse Power Dissipation** - Max power dissipation


**I<sub>R</sub> - Reverse Leakage Current** - Current measured at V<sub>RWM</sub>

**V<sub>F</sub> - Forward Voltage** - Drop for Uni-directional

## Ratings and Characteristic Curves (TA=25°C unless otherwise noted)

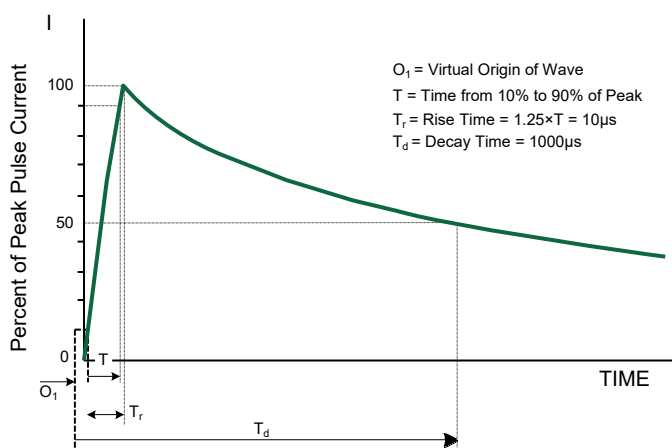


Pulse Waveform- 10/1000µs

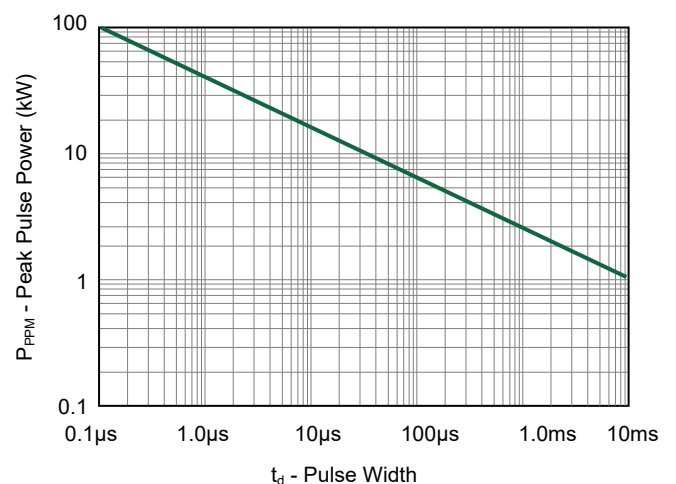


Peak Pulse Power Rating Curve


## Ratings and Characteristic Curves (TA=25°C unless otherwise noted)

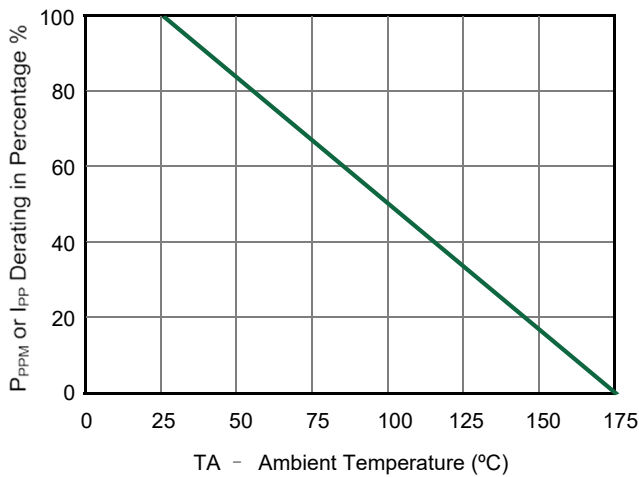


**Pulse Derating Curve**

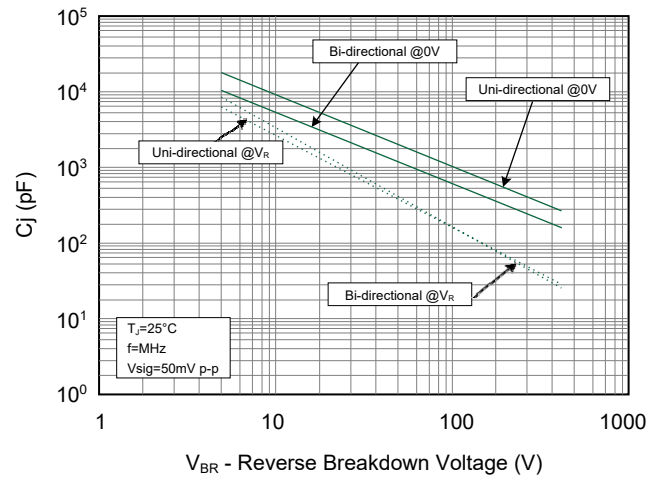

**Typical Junction Capacitance**

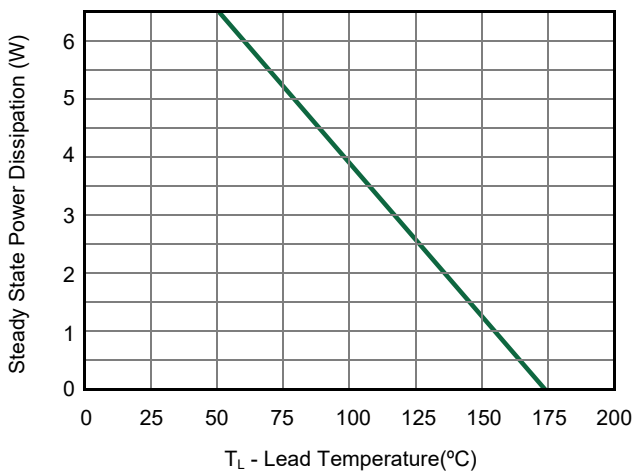


**Steady State Power Derating Curve**

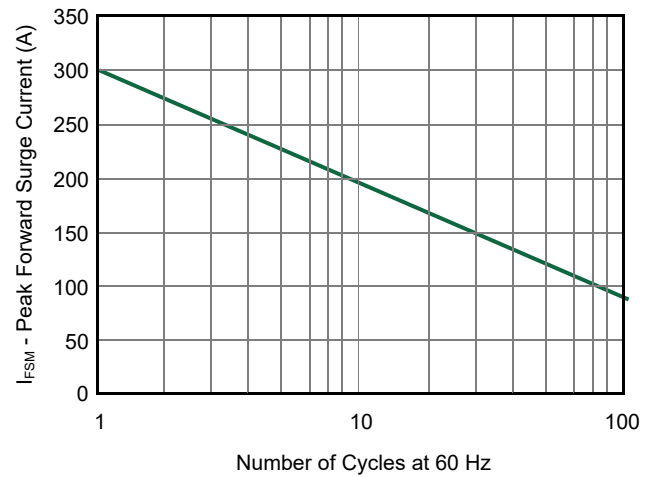

**Maximum Non-Repetitive Peak Forward Surge Current Uni-Directional Only**


## Product Dimensions

Dimensions	Inches		Millimeters	
	Min	Max	Min	Max
A	0.108	0.128	2.750	3.250
B	0.260	0.291	6.600	7.400
C	0.220	0.246	5.590	6.250
D	0.078	0.116	1.980	2.950
E	0.030	0.060	0.760	1.520
F	-	0.008	-	0.203
G	0.303	0.323	7.700	8.200
H	0.006	0.012	0.152	0.305
I	0.129	-	3.300	-
J	0.094	-	2.400	-
K	-	0.165	-	4.200
L	0.094	-	2.400	-

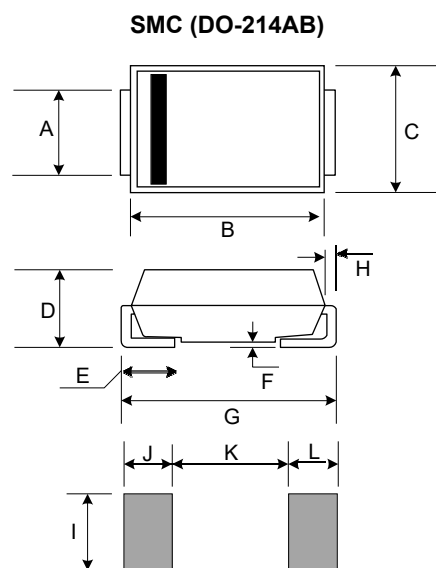


## Soldering Parameters

Profile Feature	Lead-Free Assembly
Average Ramp-up Rate ( $T_{S_{MAX}}$ to $T_p$ ) Average Ramp-down Rate ( $T_p$ to $T_L$ )	3°C/second max. 6°C/second max.
<b>Preheat</b> • Temperature Min ( $T_{S_{MIN}}$ ) • Temperature Max ( $T_{S_{MAX}}$ ) • Time ( $t_s$ Preheat)	150°C 200°C 60-180 seconds
<b>Time maintained above:</b> • Temperature ( $T_L$ ) • Time ( $t_L$ )	217°C 60-150 seconds
<b>Peak/Classification Temperature</b> • Temperature ( $T_p$ )	260 <sup>+0/-5</sup> °C
<b>Time within 5°C of actual Peak</b> Time ( $t_p$ )	20-40 seconds
<b>Time 25°C to peak Temperature</b>	8 minutes max
<b>Do not exceed</b>	260 °C

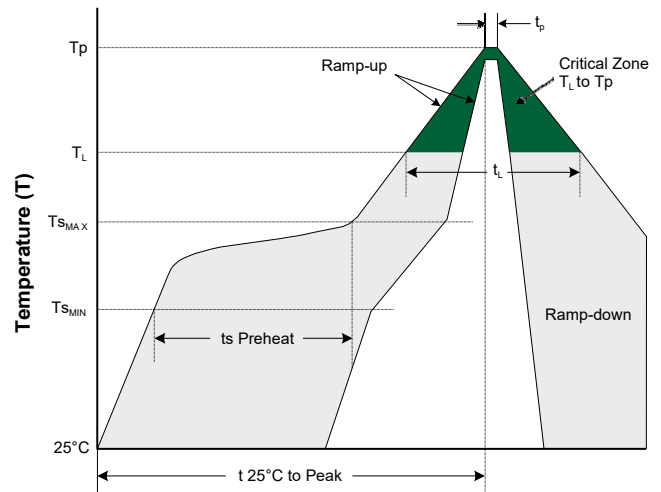

## Part Numbering System

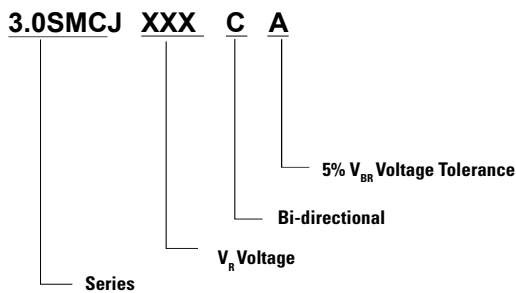

## Order Information

Device	Package	Quantity	Tape
3.0SMCJ series	SMC/DO-214AB	500	7" Reel
3.0SMCJ series	SMC/DO-214AB	3000	13" Reel